




LINEAR PENDANT LAMP – EU VERSION

THOMAS BENTZEN ON THE DESIGN "The Linear Lamp Series is designed from the idea of creating smaller atmospheres through modern light, bringing a sense of intimacy to larger spaces. With their elegant expression, subtle details and inherent functionality of a dimmable light source, the designs create space for both being and working on your own as well as making for a friendly environment when in the company of others. Use the Linear Lamp Series for any space in need of modern, functional lighting that can be adjusted to the exact purpose of your space."

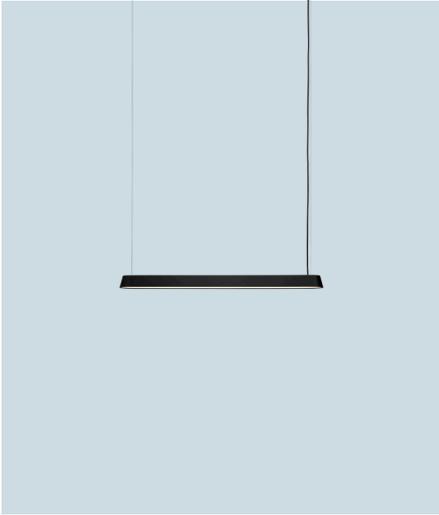

DESIGNED BY / YEAR OF DESIGN

Thomas Bentzen / 2020

ABOUT THE DESIGNER

Thomas Bentzen is a Copenhagen-based designer, working to infuse his designs with a refined simplicity. His studio was founded in 2010, creating designs that have received international recognition at fairs and exhibitions all over the world.

CATEGORY

Pendant lamp

ENVIRONMENT

Indoor

DESCRIPTION

An elegant lamp, designed with simple lines and dimmable light source.

MATERIAL

Lamphead in pressure-die casted and extruded, powder coated aluminum. Stem in powder coated steel. Diffuser in polycarbonate. PVC cord.

CORD & WIRE LENGTH

400 cm / 157,5"

BULB INCLUDED

Yes. Integrated LED.

CEILING CAP INCLUDED


Yes, white.

DIMMABLE FUNCTION

Yes

CLEANING AND CARE

Clean with soft dry cloth only. Always switch off electricity supply before cleaning.


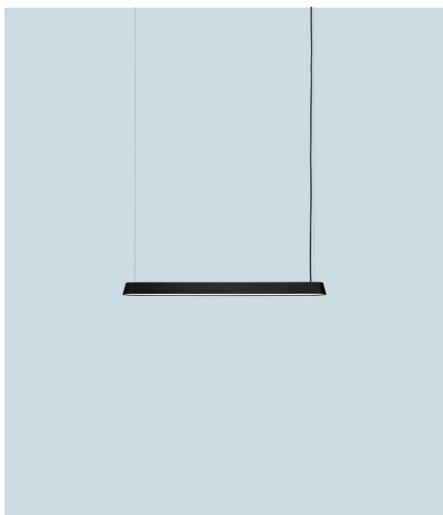


LINEAR PENDANT LAMP – EU VERSION



LAMP RATING

Voltage	220-240V
Frequency	50/60Hz
IP Rating	IP20
Classification	Class II
Socket	Integrated, non-replaceable LEDs

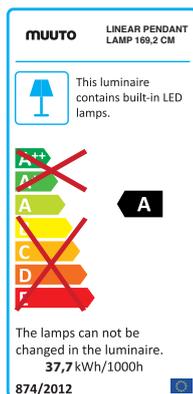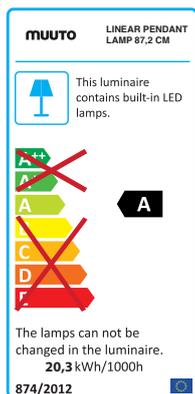

BULB SPECIFICATION - 87,2 CM / 34.3"

Item	Integrated, non-replaceable LEDs
Watt	20,3 W
Luminous flux	1060 lm
Color temperature	3000 K
Color consistency	3 McAdam steps
Lumen maintenance (70%)	48.000h
CRI	90
Dimmable	Yes
Risk Group	Except

BULB SPECIFICATION - 169,2 CM / 66.6"

Item	Integrated, non-replaceable LEDs
Watt	37,7 W
Luminous flux	1880 lm
Color temperature	3000 K
Color consistency	3 McAdam steps
Lumen maintenance (70%)	48.000h
CRI	90
Dimmable	Yes
Risk Group	Except

GENERAL STANDARDS & CERTIFICATES

EU/UK

CE (Low Voltage Directive - 2014/35/EU)
IEC 60598-1 (EU deviations)
IEC 60598-2-1 (EU deviations)

Electromagnetic Compatibility (EMC) Directive - 2014/30/EU

ROHS Directive - 2011/65/EU amended RoHS 3 Directive 2015/863

ECO Design Directive - 2009/125/EC

WEEE Directive - 2012/19/EU

REACH Directive - EC/1907/2006

